


# Kinghelm®

REVISIONS				
REV NUMBER	DESCRIPTION	DWN	CHK	DATE
A	DESIGN			

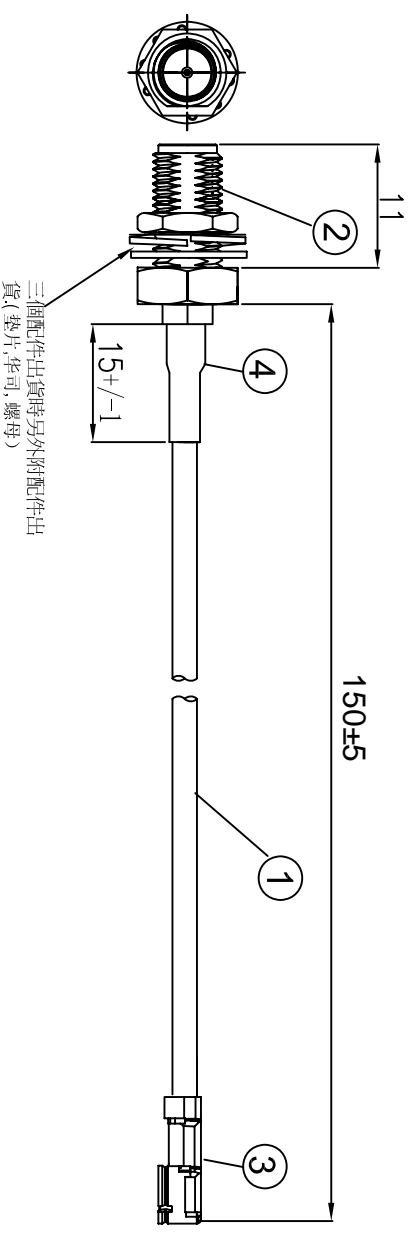

**NOTES:**

1. ELECTRICAL:
  - 1.1. VOLTAGE RATING:DCV 300V 10MS
  - 1.2. CONDUCTANCE RESISTANCE:3.0 OHMMAX.
  - 1.3. INSULATION RESISTANCE:5.0M OHM/MIN.
  - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
  - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
2. MATERIAL:
  - 2.1. SEE TABLE
3. ALL COMPONENTS ARE ROHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	套管	黑色热缩套管, OD:2.0MM	AS
③	端子	高仿I-PEX081 4代端子, 镀金	1
②	接头	SMA母头母针, 分体, 11牙, 镀金	1
①	同轴线	RF0.81 线材,颜色: 黑色, OD:0.81mm	AS

深圳市金航标电子有限公司 [WWW.BDS6666.COM](http://WWW.BDS6666.COM)

KH-I PEX4-SMA-RG081 - 150mm 0755-83044319

ALL DIMENSION ARE IN MM		DRAWN	DATE	I-PEX 0.81 4代 TO SMA /F L=150mm	
		Jamy	2020-06-18		
COMPUTER GENERATED IN SOLIDWORKS		ENG.			
DO NOT SCALE THIS DRAWING		MFG.			
PROJECTION		Q.A.			
GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX ± 1° ± 0.3 ± 0.25 ± 0.150					

CUSTOMER P.N.:

SIZE	Number	REV
B		A

SCALE: Free TYPE SHEET 1 OF 1