


Kinghelm®

| REVISIONS | | | | | |
|-----------|--------|-------------|-----|-----|------|
| REV | NUMBER | DESCRIPTION | DWN | CHK | DATE |
| A | | DESIGN | | | |
| | | | | | |

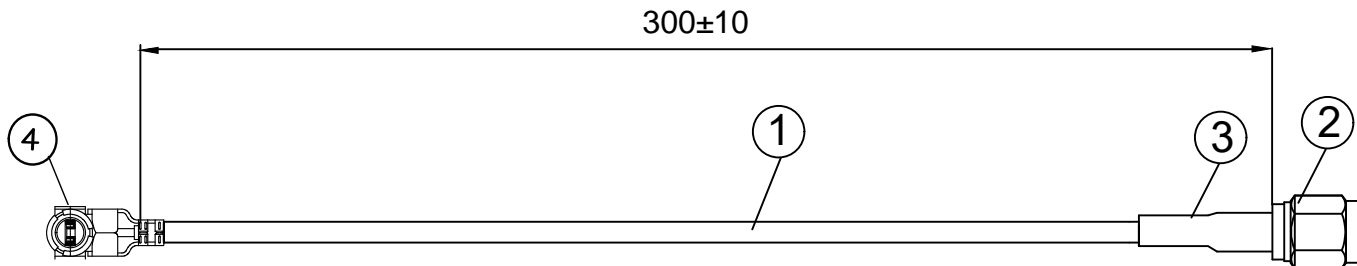

NOTES:

1. ELECTRICAL:
 - 1.1. VOLTAGE RATING:DC 300V 10MS
 - 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
 - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
2. MATERIAL:
 - 2.1. SEE TABLE
3. ALL COMPONENTS ARE RoHS COMPLIANT.

| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. |
|----------|-------------|------------------------|------|
| ④ | 接头 | 国产IPEX一代端子 | |
| ③ | 套管 | OD:2.5* 15 mm 套管 | 1 |
| ② | 接头 | SMA 公头直头,公针,镀金 | 1 |
| ① | 同轴线 | RG1.78黑色同轴线, OD:1.78mm | AS |

深圳市金航标电子有限公司
SHENZHEN KINGHELM ELECTRON CO., LTD.

| | | | |
|----------------------------------|------------------------------|----------------------|--|
| ALL DIMENSION ARE IN MM | DRI | DATE | KH-SMAJ-IPEX-RG1.78-300 |
| | DRAIN. Jamy | 2023/8/11 | |
| COMPUTER GENERATED IN SOLIDWORKS | CHK. Alan | 2023/8/11 | |
| DO NOT SCALE THIS DRAWING | APP. Ellis | 2023/8/11 | |
| PROJECTION | GENERAL TOLERANCE FOR ANGLES | | www.kinghelm.com.cn 0755-28190160 |
| | XX | X.XX X.XXX | |
| | ± 1° | ± 0.3 ± 0.25 ± 0.150 | SCALE: Free |
| | | | TYP |
| | | | SHEET 1 OF 1 |