


Kinghelm®

REV		REVISIONS		
NUMBER	DESCRIPTION	DWN	CHK	DATE
A	DESIGN			

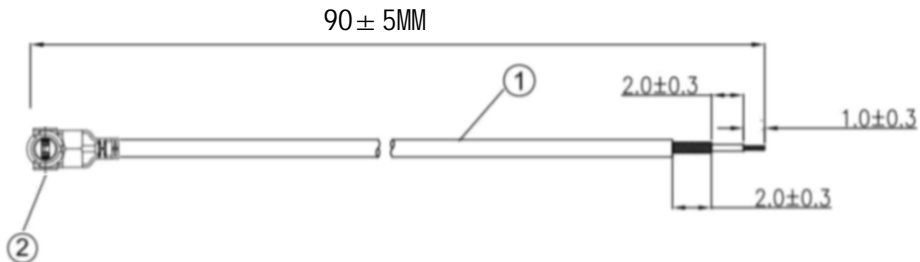

NOTES:

1. ELECTRICAL:
 - 1.1. VOLTAGE RATING:DCV 300V 10MS
 - 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
 - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES
2. MATERIAL:
 - 2.1. SEE TABLE
3. ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
②	接头	三代IPEX端子	1
①	同轴线	RG0.81白色线, OD: 0.81mm	AS

深圳市金航标电子有限公司

www.kinghelm.com.cn

KH-IPEX3-221-RG0.81-WH90

0755-28190160

ALL DIMENSION ARE IN MM

DRAWN *Jamy* DATE 2020-06-15

ENG.

三代IPEX TO OPEN RG0.81白色转接线


COMPUTER GENERATED IN SOLIDWORKS

MFG.

DO NOT SCALE THIS DRAWING

Q.A.

PROJECTION



GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX
 $\pm 1^\circ \pm 0.3 \pm 0.25 \pm 0.150$

SIZE Number

B

REV

A

CUSTOMER PIN:

SCALE: Free

TYPE

SHEET 1 OF 1