


Kinghelm®

| REVISIONS | | | | | |
|-----------|--------|-------------|-----|-----|------|
| REV | NUMBER | DESCRIPTION | DWN | CHK | DATE |
| A | | DESIGN | | | |

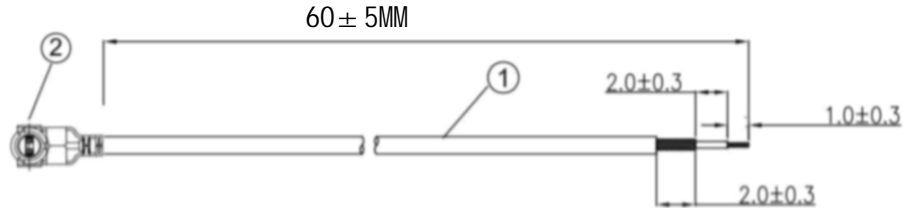

NOTES:

1. ELECTRICAL:
 - 1.1. VOLTAGE RATING-DCV 300V 10MS
 - 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
 - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES
2. MATERIAL:
 - 2.1. SEE TABLE
3. ALL COMPONENTS ARE RoHS COMPLIANT.

| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. |
|----------|-------------|-----------------------|------|
| ② | 接头 | 四代IPEX端子 | 1 |
| ① | 同轴线 | RG0.81 蓝色线, OD:0.81MM | AS |

深圳市金航标电子有限公司


www.kinghelm.com.cn

KH-IPEX4-221-RG0.81-BU60

0755-28190160

| | | | | |
|----------------------------------|-------|------|------|------------|
| ALL DIMENSION ARE IN MM | DRAWN | Jamy | DATE | 2020-06-15 |
| | ENG. | | | |
| COMPUTER GENERATED IN SOLIDWORKS | MFG. | | | |
| DO NOT SCALE THIS DRAWING | Q.A. | | | |

四代IPEX TO OPEN RG0.81蓝色转接线



GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX
± 1° ± 0.3 ± 0.25 ± 0.150

| | | | |
|-------------|--------|--------------|---|
| SIZE | Number | REV | A |
| SCALE: Free | TYPE | SHEET 1 OF 1 | |

CUSTOMER PIN: