


Kinghelm[®]

Model: KH-IPEX3-SMA-RG081-80mm

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

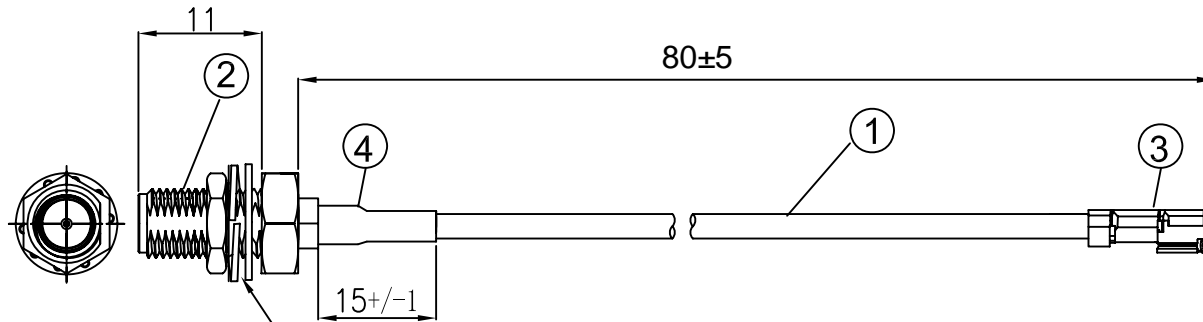

Three components are delivered with accessories (2 washers and 1 nut)

NOTES:

1. ELECTRICAL:
 - 1.1. VOLTAGE RATING:DCV 300V 10MS
 - 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
 - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
2. MATERIAL:
 - 2.1. SEE TABLE
3. ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PATR NUMBER	DESCRIPTION	QTY
④	Tube	Black Heat-shrink Tube, OD:2.0MM	AS
③	Terminal	High-quality Copy I-PEX 0.81 Terminal, gold-plating	1
②	Joint	SMA-K, split-type with 11 screws, gold-plating	1
①	Coaxial Cable	RF 0.81 Grey Cable, OD:0.81mm	AS

SHENZHEN KINGHELM ELECTRONIC CO., LTD.

WWW.BDS666.COM

KH-IPEX3-SMA-RG081-80mm

0755-83044319

ALL DIMENSION ARE IN MM

DRAWN Jamy DATE 2020-06-18

ENG.

COMPUTER GENERATED IN SOLIDWORKS

MFG.

DO NOT SCALE THIS DRAWING

Q.A.

I-PEX 0.81 3代 TO SMA /F L= 80 mm

PROJECTION

GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX
± 1° ± 0.3 ± 0.25 ± 0.150


SIZE Number

B

REV

A

CUSTOMER P/N:



SCALE: Free

TYPE

SHEET 1 OF 1