

Datasheet

Model: **KH-PH-PT2.0**

SPECIFICATIONS

(Poles): 2~30

(Applicable wires): AWG30#~24#

(Applicable PC board thickness): 1.6mm

(Temperature range): $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$

(Voltage rating): 250V.AC/DC

(Current rating): 2A

(Contact resistance): $\leq 0.02\Omega$

(Insulation resistance): $\geq 1000\text{M}\Omega$


(Withstand voltage): 800V.AC/1min



MATERIAL

(Terminal):

(Phos.bronze Tin/plated)

PH-PT

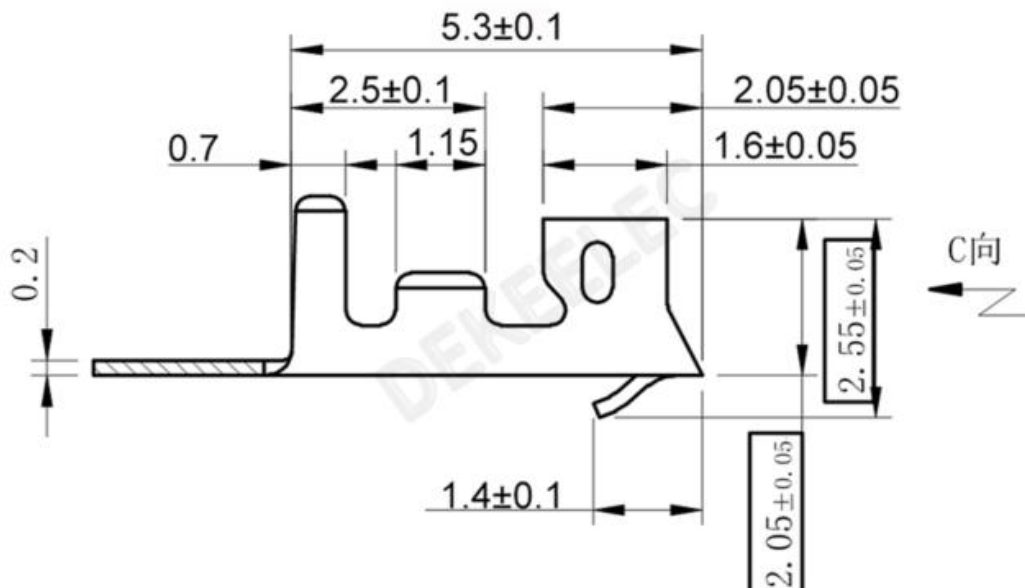

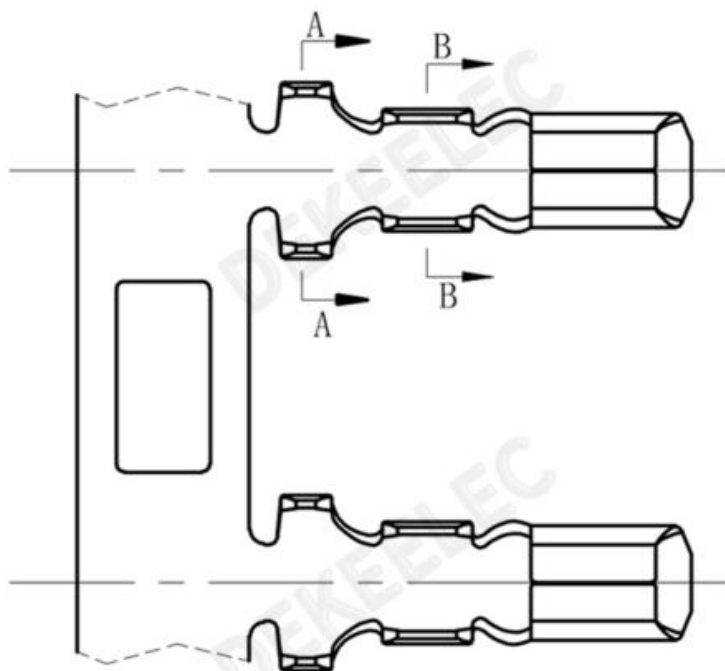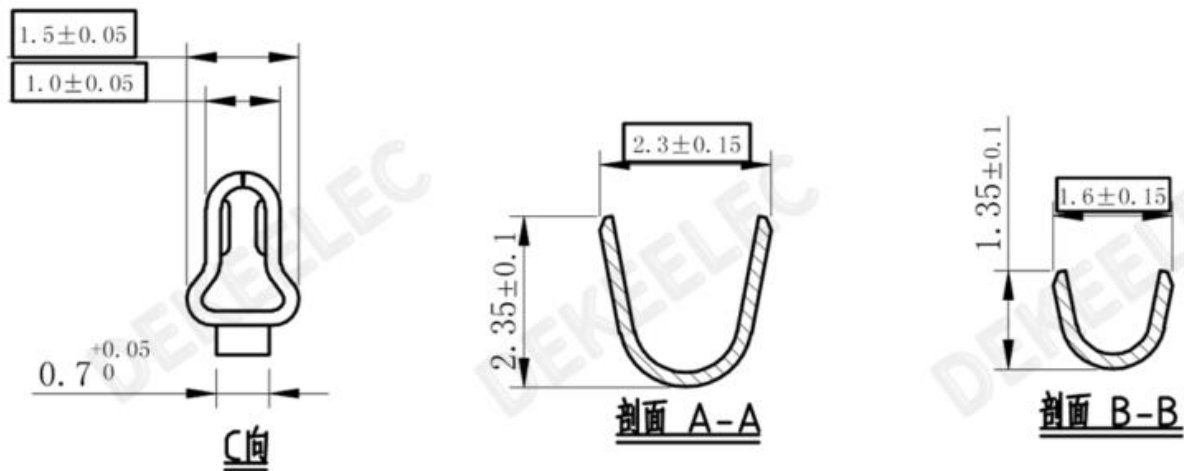

Terminal(PH)

| Type | Applicable wires | | O.D of wire ins |
|-------|------------------|-------|-----------------|
| | mm ² | AWG# | mm |
| XH-PT | 0.5~0.22 | 30~24 | 0.9~1.5 |