


REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

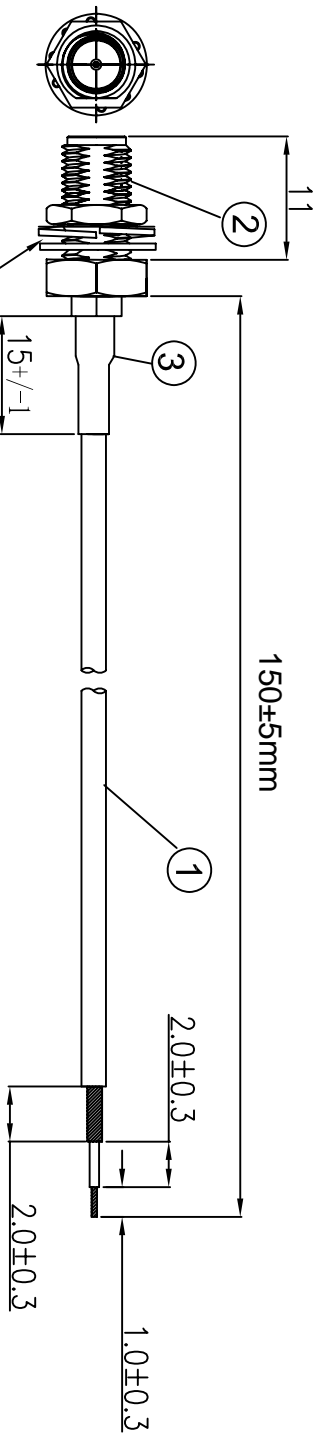

Three components are delivered with accessories  
(Gasket, washer and nut)

**NOTES:**

1. ELECTRICAL:
  - 1.1. VOLTAGE RATING:DCV 300V 10MS
  - 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
  - 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
  - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
  - 1.5. IT SHOULD BE NO ANY OPENS/SHORT, MISWIRING AND INTERMITTENT FAILURES
2. MATERIAL:
  - 2.1. SEE TABLE
3. ALL COMPONENTS ARE ROHS COMPLIANT.

ITEM NO.	PATR NUMBER	DESCRIPTION	QTY
③	Tube	Black Heat-shrink Tube, OD:2.0MM	AS
②	Joint	RP-SMA-K, Split-type, 11 Screws, Gold-plating	1
①	Coaxial Cable	RF-1.13 Black Cable, OD:1.13mm	AS

SHENZHEN KINGHELM ELECTRONIC CO., LTD.


[WWW.BDS666.COM](http://WWW.BDS666.COM)

Model : KH-122-SMA-150

0755-83044319

ALL DIMENSION ARE IN MM		DRAWN	DATE	SMA /F TO OPEN L=150mm	
		Jamy	2020-06-15		
COMPUTER GENERATED IN SOLIDWORKS		ENG.			
MFG.					
Q.A.					
DO NOT SCALE THIS DRAWING		GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX			
PROJECTION		± 1° ± 0.3 ± 0.25 ± 0.150			

CUSTOMER P/N:



GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX  
± 1° ± 0.3 ± 0.25 ± 0.150

SIZE	Number	REV
B		A

SCALE: Free

TYPE

SHEET 1 OF 1